

Instructions on setting multi iflag

When SIMHUB cannot recognize the connection of multiple iflag at the same time, the problem lies in the overlap of device names, and SIMHUB cannot recognize overlapping device names. Modification steps are as follows


If you connect 2 iflags, Follow the Steps below, need set only one iflag and the other iflag no need to set


If you connect 3 iflags or more ,Follow the Steps below and set iflag one by one and the last iflag no need to set

Step 1.

Connect only one iflag to PC and open SIMHUB and Follow the steps below

1. Multiple arduinos---> 2. open arduino setup tool--> 3. reload my last settings

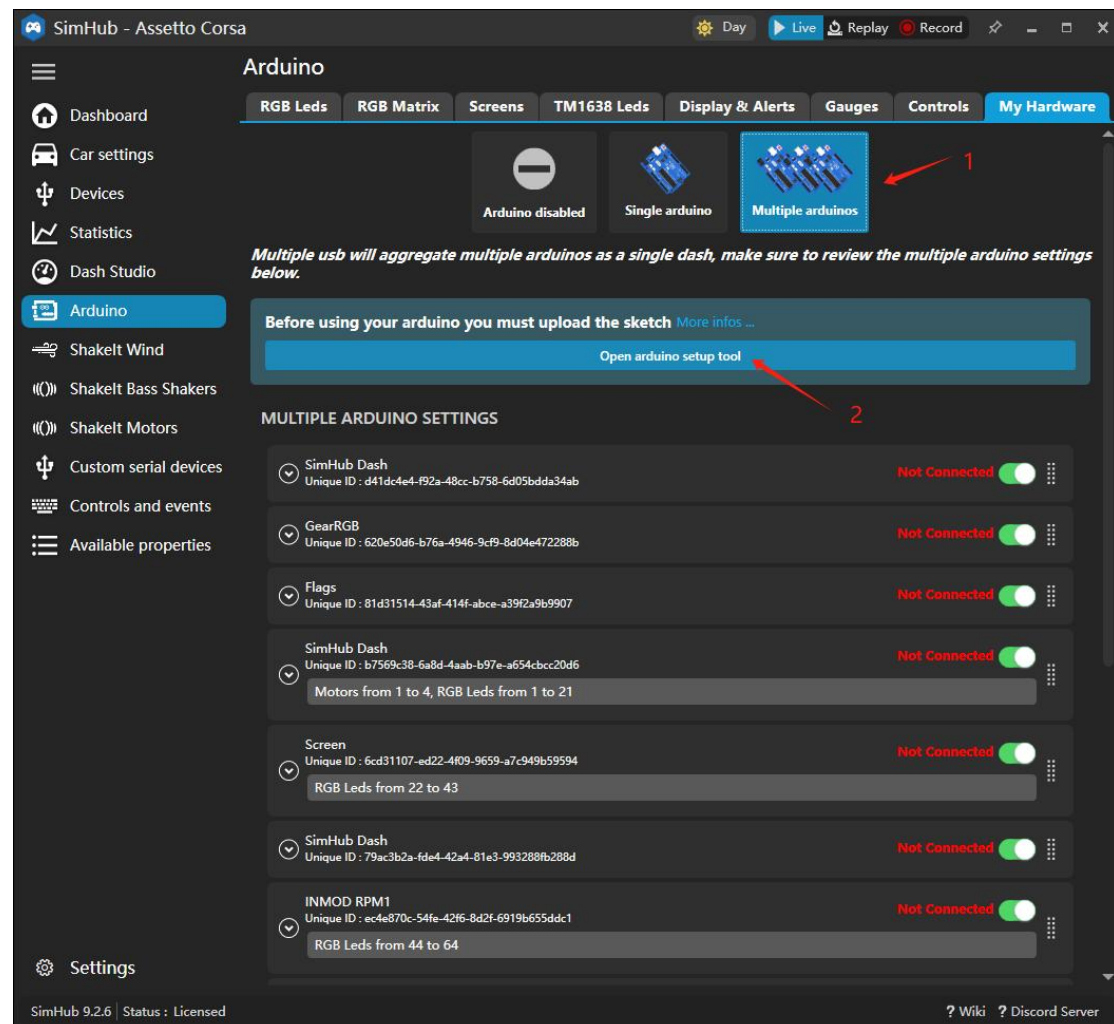


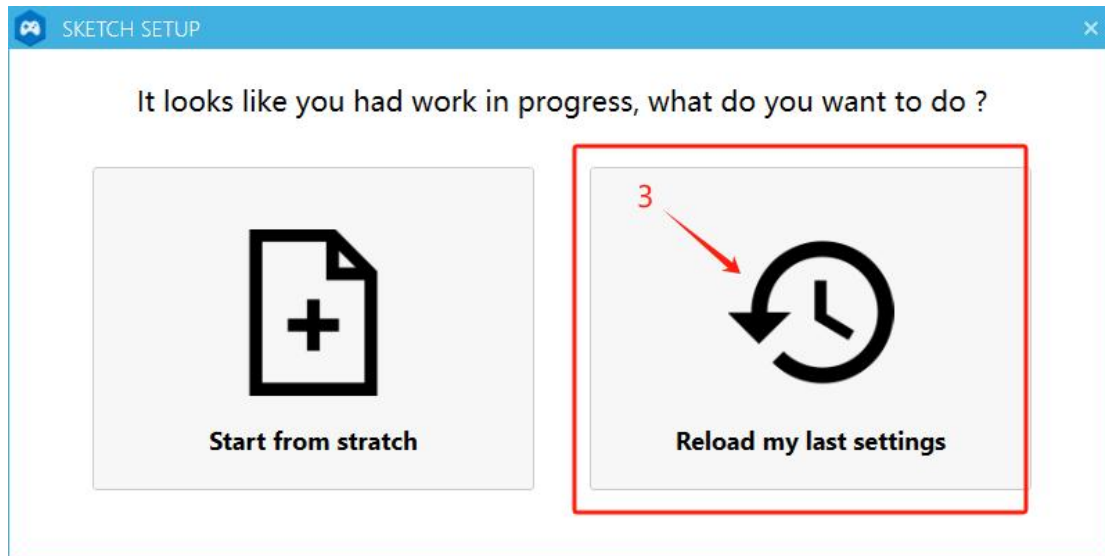


Step 2

Follow the following procedures

1. Choose “Arduino Nano(ATMega328) **old** bootloader”
2. Change a unique name
3. choose the COM port you inserts
4. Choose PIN number 6
5. Tick
6. Click UPLOAD TO ARDUINO

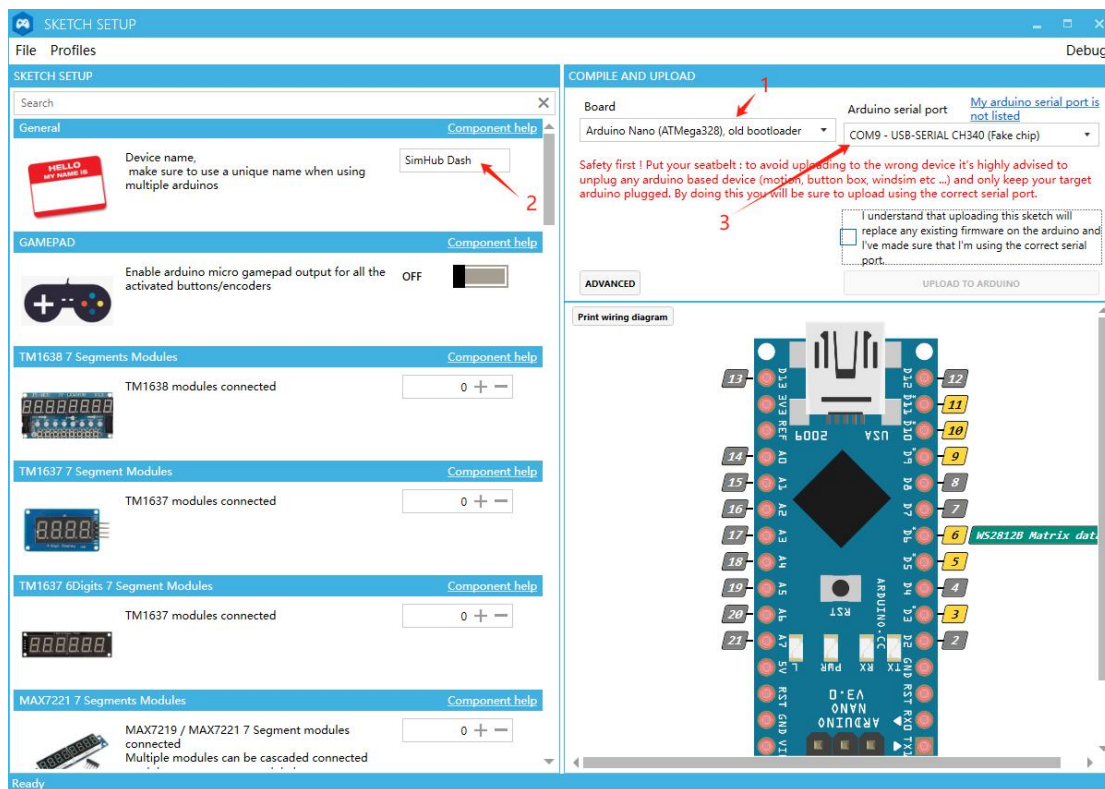


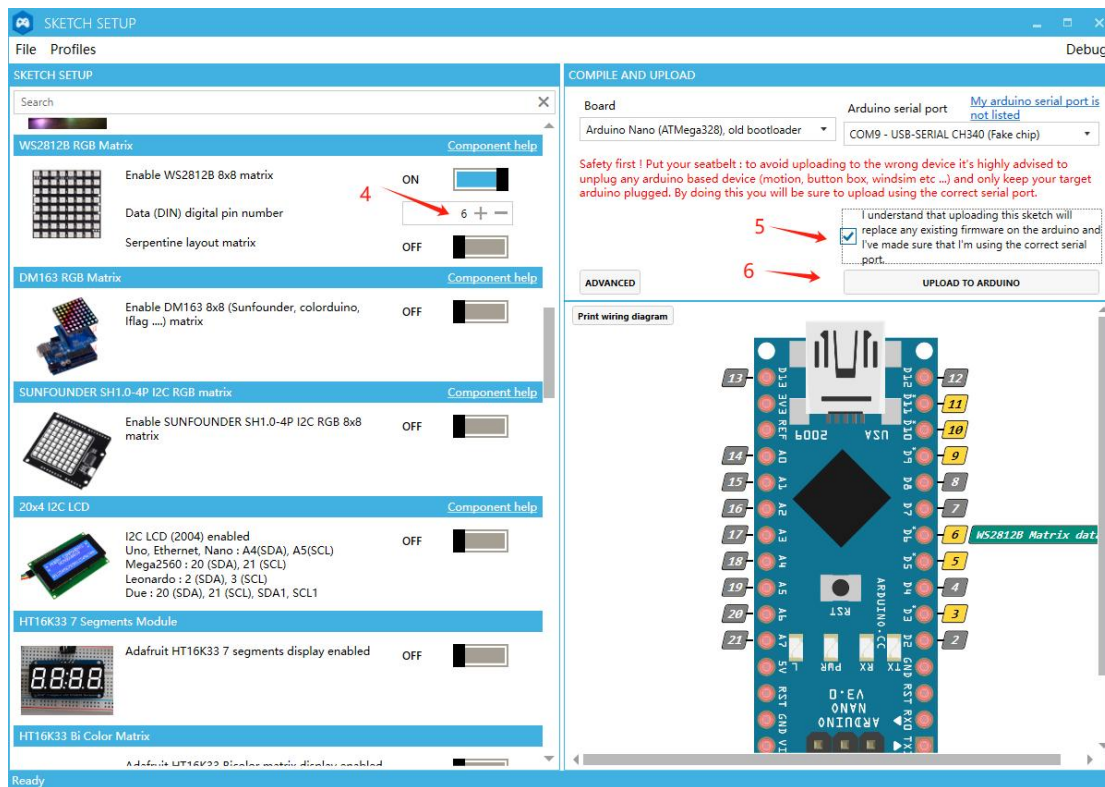


Step 3

Wait and program will be uploaded.

Click OK when done

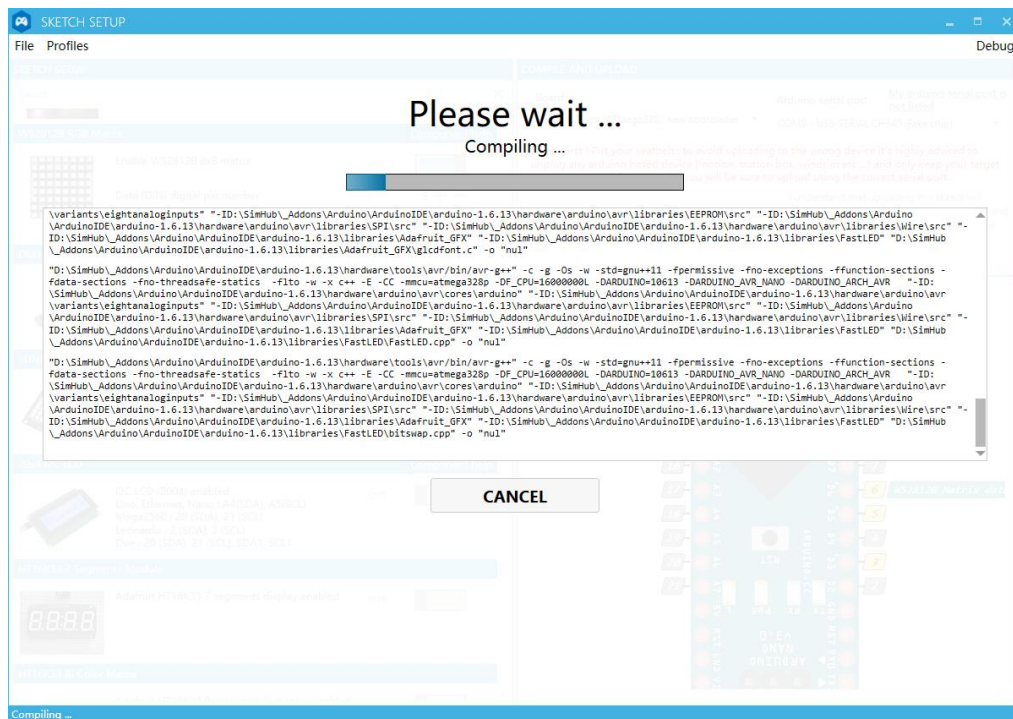

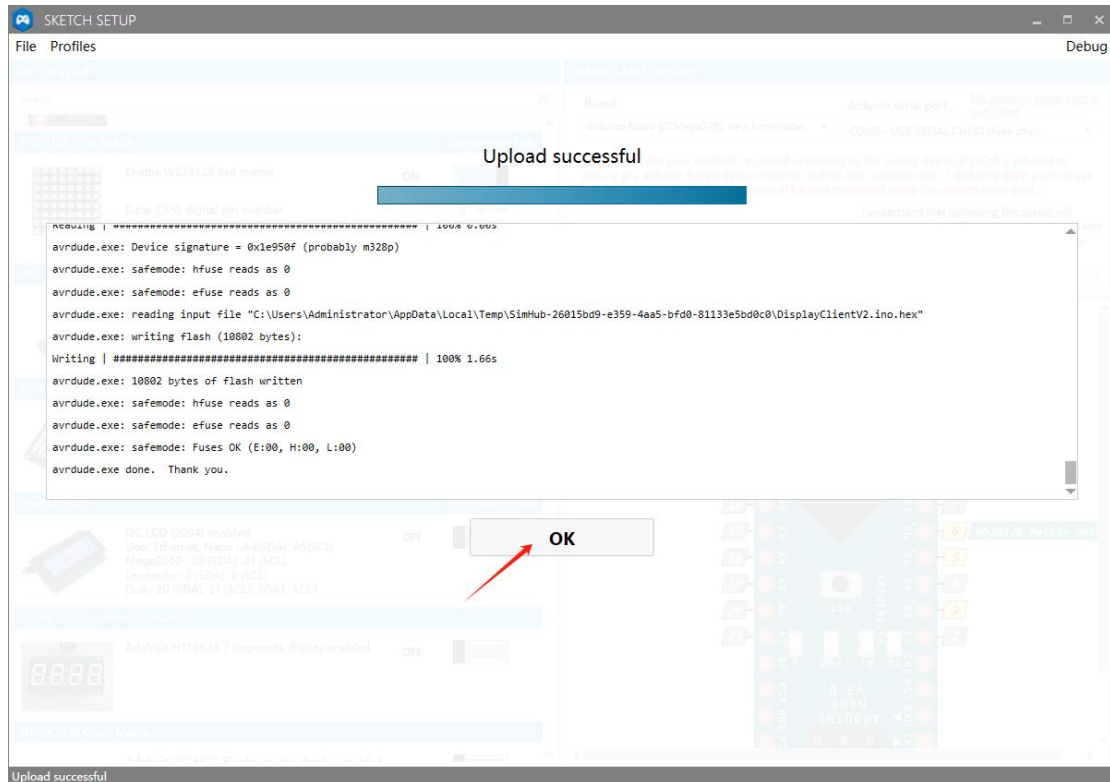

There could be failure of uploading.

Reselect the “Arduino Nano(ATMega328) **new** bootloader“,in procedure 1 of Step 2 and start over from procedure 2 of Step 2

(if you first select the **new** bootloader and fails ,the second time you select the **old** bootloader and start over)

